

บันไดพับ (วัสดุไฟเบอร์กลาส) ADVENT FIBERGLASS STEP LADDER FS1500 SERIES



A multifunctional top designed to increase productivity.

- **Hardware TRAY**
Recessed tray provides area to secure hardware from falling off the top.
- **Paint bucket Holder**
Convenient recessed tray holds quarter/half/full gallon paint buckets.
- **Drill slots**
Two separate drill slots make for a variety of convenient options especially when also using the paint bucket holder.
- **Screwdrivers/pliers**
Featuring plenty of slots, ProTop™ will hold all the tools needed.
- **Curved front**
Curved surface on front of top helps provide leg comfort.
- **Pipe & 2x4 holder**
Groove across top keeps pipes and 2x4's from getting away from you.
- **Magnet TRAY**
Easily secures metallic hardware and tools. Not available on type II ladders.



ProTop™ - versatile and durable

ProTop™ is a multifunctional top featuring a magnet tray, hardware tray, curved ergonomic front, drill and tool slots, paint bucket holder, and a pipe or 2x4 holder to increase productivity. Patent #D597,685 & patents pending



Da Boot™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip-resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of fiberglass rail. Patent #7,000,731 B2



Inside spreader braces

Spreader braces inside fiberglass rails help protect braces from getting hooked or abused in transit.



Double-rivet step construction

Each step secured with six, large-headed, solid rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



WIDE-BACK BRACES


Vertically mounted U-shaped back braces spaced on one foot intervals provide maximum stiffness and discourage unsafe climbing. Heavy duty bottom back brace provides additional strength to the bottom of the ladder.



Model	Size	Step Size	Bottom Width	Approx. Spread	Approx. Weight
FS1504	4'	3"	19.9/16"	28.15/16"	14 LBS
FS1505	5'	3"	21.1/16"	34.7/8"	17 LBS
FS1506	6'	3"	22.9/16"	40.7/8"	20 LBS
FS1508	8'	3"	25.9/16"	52.3/4"	26 LBS
FS1510	10'	3"	28.9/16"	64.11/16"	34 LBS
FS1512	12'	3"	31.9/16"	76.1/16"	47 LBS

*FS1502 is a folding step stand & is not equipped with Da Boot™ or ProTop™

บันไดเลื่อน (วัสดุไฟเบอร์กลาส) FIBERGLASS CHANNEL EXTENSION FE3200 SERIES

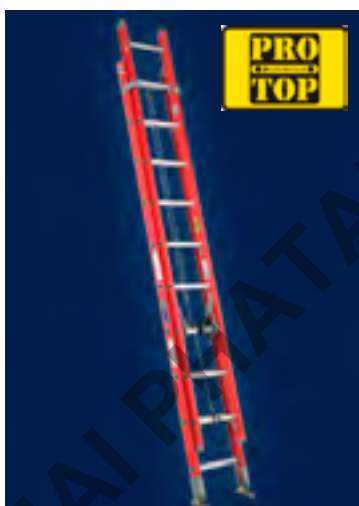

A multifunctional top designed to increase productivity.

- **CORNER GRIP**
The V-shape design provides greater stability on corners.
- **POLE GRIP**
The V-shape design with rubber tread makes it ideal for working against poles or trees. The tool slots provide the option for lashing the ladder to the pole or tree.
- **INTEGRATED BUMPER**
Soft non-marking/non-marring rubber tread protects the work surface.
- **WIDER DESIGN**
Wider design provides greater stability and 700% more contact area on flat surfaces.
- **WORK TRAY**
Non-conductive molded work-tray with convenient handyman's tool slots.



Quicklatch® equipped Runglock

Provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



SWIVEL SAFETY SHOES

Heavy duty plated steel shoes with thick rubber tread. Shoe can be used with tread down or in spike position.



OUTSIDE SLIDE GUIDES

Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.



ROUND RUNGS

Tempered round aluminum rungs are fully serrated for slip-resistant surface. Each rung end is hydraulically double crimped to side rail.



Mar-resistant rail end caps

Impact-resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.

SPECIFICATION

Sizes	Rail Depth	Stack Height	Inside Base	Width Fly	Outside Base	Width Fly
16' - 28'	3.1/4"	6.1/8"	14.11/16"	13.11/16"	17.1/16"	16.1/16"
32' - 40'	3.5/16"	6.1/8"	15.5/16"	14.5/16"	17.11/16"	16.11/16"

TWO SECTION EXTENSION LADDER

Model	Total Length Size	Length each section	Maximum Extended Length	Approx. Weight (LBS)
FE3216*	16'	8'	13'	30
FE3220	20'	10'	17'	42
FE3224	24'	12'	21'	52
FE3228	28'	14'	25'	58
FE3232	32'	16'	29'	70
FE3236**	36'	18'	32'	79
FE3240**	40'	20'	35'	93



*Does not include rope and pulley.
** 250 lb. Type I rated.



บันไดพับ (วัสดุอลูมิเนียม) SENTRY ALUMINUM STEP LADDER AS3000 SERIES



ProTop™ - versatile and durable
ProTop™ is a multifunctional top featuring a magnet tray, hardware tray, curved ergonomic front, drill and tool slots, paint bucket holder, and a pipe or 2x4 holder to increase productivity. Patent #D597,685 & patents pending



SLIP-RESISTANT RUBBER FEET
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



Center-pull spreader brace
Unique center-pull spreader brace designed for one-hand operation. Brace is plated steel for extra durability




OPTIONAL MOLDED PAIL SHELF
Features many tools slots, a drill slot, and can securely hold a paint tray as well as round or square paint buckets.

Model	Size	Step Size	Bottom Width	Approx. Spread	Approx. Weight
AS3003	3'	3"	17.1/8"	22.1/8"	10 LBS
AS3004	4'	3"	18.5/8"	28.1/16"	13 LBS
AS3005	5'	3"	20.1/8"	33.15/16"	15 LBS
AS3006	6'	3"	21.5/8"	39.7/8"	17 LBS
AS3008	8'	3"	24.5/8"	51.11/16"	23 LBS
AS3010	10'	3"	27.5/8"	63.9/16"	28 LBS
AS1012	12'	3"	31.13/16"	76.7/16"	38 LBS
AS1014	14'	3.5/8"	34.3/4"	90"	60 LBS
AS1016	16'	3.5/8"	37.3/4"	102"	70 LBS
AS1018	18'	3.5/8"	40.3/4"	114"	81 LBS
AS1020	20'	3.5/8"	43.3/4"	126"	93 LBS

*AS3002 is a folding step stand and is not equipped with the ProTop™

บันไดพาดและเลื่อน (วัสดุอลูมิเนียม) COMMERCIAL ALUMINUM EXTENSION AE4000 SERIES

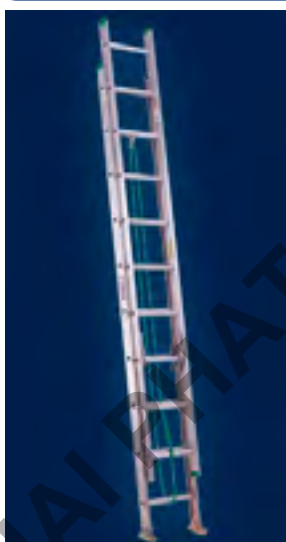

Quicklatch® equipped Runglock
Provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



SWIVEL SAFETY SHOES
Heavy duty plated steel shoes with thick rubber tread. Shoe can be used with tread down or in spike position.



D-shaped rungs
Flat top, D-shape provides greater standing area than round rungs. Fully serrated for slip-resistant surface.



Full I-beam
Slide rails are extra heavy duty 3" I-beam extrusions for maximum strength.

SPECIFICATIONS

Sizes	Rail Depth	Stack Height	Inside Base	Width Fly	Outside Base	Width Fly
16' - 40'	3"	5.1/4'	15.1/4"	14.5/16"	17.1/8"	16.3/16"

บันไดพาด SINGLE LADDERS

Model	Total Length	Approx. Weight (LBS)	Approx. Cubes
AE4108	8'	12	4.4'
AE4110	10'	17	5.1'
AE4112	12'	20	5.9'
AE4114	14'	23	7.5'
AE4116	16'	29	8.5'
AE4118	18'	31	8.7'
AE4120	20'	36	10.1'

บันไดเลื่อน TWO SECTION EXTENSION LADDERS

Model	Total Length Size	Length each section	Maximum Extended Length	Approx. Weight (LBS)
AE4216*	16'	8'	13'	27
AE4220	20'	10'	17'	32
AE4224	24'	12'	21'	38
AE4228	28'	14'	25'	48
AE4232	32'	16'	29'	58
AE4236	36'	18'	32'	71
AE4240	40'	20'	35'	80

* Does not include rope & pulley -Quick Latch® -Swivel Safety Shoes -D-Shaped Rungs -Modified I-Beam -Mar-Resistant End Caps

